

Bituthene® Primer B3

Bituminous primer for use with the Bituthene® range of cold applied, self-adhesive waterproof membranes.

Description

Bitumen based solvent primer for application to substrates prior to the application of Bituthene self – adhesive waterproof membranes.

Applications

- Concrete
- Masonry
- Steel substrates

System Components

- Bituthene 8000 HC – self-adhesive waterproof membrane for hot climates
- Bituthene 3000 HC - self-adhesive waterproof membrane for hot climates
- Bituthene LM – two component liquid membrane for detailing

Supply and Storage

| Pack Size | Packaging |
|-----------|------------|
| 20 Lt | Metal pail |
| 200 Lt | Metal drum |

Store unopened in original packaging in cool, dry conditions out of direct sunlight and remote from direct heat sources. Shelf life in these conditions is 12 months from date of manufacture.

Technical Data

| Bituthene Primer B3 | Typical Value |
|---------------------|--|
| Drying time | 12 hours (depending on temperature and substrate conditions) |
| Solids content | 55% |
| Coverage | 8 – 10 m ² /litre (depending on substrate surface and porosity) |

Note: All test results shown in this data sheet are determined under laboratory conditions, using product samples taken from inventory in original packaging, without alteration or modification.

Advantages

- Improves adhesion of Bituthene waterproof membrane
- East Application by brush or roller
- High solids content

Application Instructions

Surface preparation:

Concrete substrates should be dry and free from surface contaminants such as curing compounds, dust etc. Remove any friable material and laitance by mechanical means.

Application:


- Apply by brush or roller at a coverage rate that gives a uniform dry film coating.
- Bituthene waterproof membranes can be applied to the primed substrate as soon as the primer is 'touch dry'.
- Do not apply Bituthene waterproof membranes to primed substrates whilst the primer is still wet.
- On highly porous substrates two coats may be necessary.
- Ensure no spillages onto other waterproofing products.
- There is no need to prime substrates prior to the application of Bituthene LM detailing compound.

Cleaning:

- Tools and equipment can be cleaned with a solvent tool cleaner.

Health and Safety

Before using this product, read the product labels and comply with all health and safety advice. Further health and safety information is available from the products Material Safety Data Sheet (MSDS) available from www.Micromax.com.au

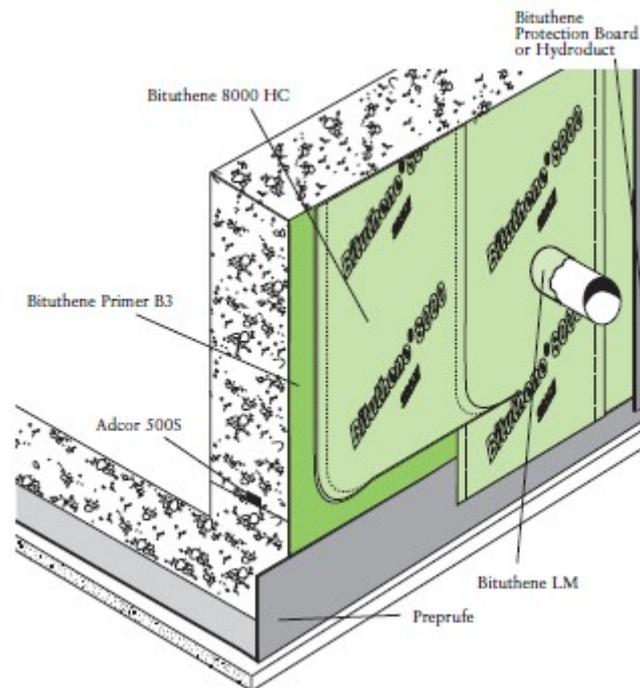

Detail shown is a typical illustration only and not a working drawing. For assistance with working drawings and additional technical advice please contact Micromax Pty Ltd on 1300 760 699 or sales@micromax.com.au