


### General Description


The XGS-06-RB26-NG is a right angle PCB bulkhead mounted connector which conforms to the standard of SMPTE ST 2081-1 and CXP-6, allowing bit-rates of 5.94Gbit/s over a single coaxial connection. The 8mm pitch and low profile of the connector enables double wiring densities and is optimised for use in 6G HD-SDI applications.

This connector was formerly sold as:  
 C-SX-113GN when supplied with ANG-C2-BBN-2.35  
 C-SX-175 when supplied with ANG-C2-BBN-1.80  
 C-SX-187GN as a connector only part

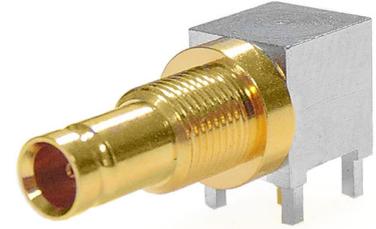

### Electrical

Impedance	75Ω	
Frequency Range	0-6GHz	
Working Voltage	250Vrms	
Reflection Factor (VSWR)	1.11 (max) 0-3GHz 1.29 (max) 3-6GHz	
Dielectric Withstanding Voltage	750Vrms	
Insulation Resistance	≥1000MΩ	
Contact Resistance	Centre Contact	≤ 4.0mΩ
	Outer Contact	≤ 2.5mΩ

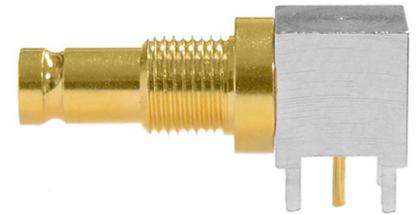

### Materials

Centre Pin	BeCu / 10 μ" Au
Metal Parts	Brass/Ni/Au
Insulators	PTFE

### Environmental

Connector Type	BNC Female
Temp Range	-65 to +85°C
Mating Cycles	500

