


Recommended Cable Stripping Dimensions

It is recommended Soldering the Centre Pin

Tool No: TLG 109



Recommended Crimping Dimensions for Ferrule


ITEM	Description	Material	Finish
5	Ferrule	Brass	Nickel
4	Pin	Brass	Gold
3	Insulator	PTFE	None
2	Body	Brass	Nickel
1	Shell	Brass	Nickel

1.4	Solder Note	07/07/2021
1.3	Tool No Added	27/03/2017
1.2	Knurl Added	04/12/2014
1.1	RL Data Added	25/09/2014
1.0	Origin	18/09/2014
<b>Iss. No.</b>	<b>CHANGE</b>	<b>Sig.Date</b>
Originated	PF	18/09/2014
Drn.	PF	18/09/2014
Chkd.		18/09/2014
Dwg. No.	XPT-D001-NGBA	

**TITLE** Micro BNC Cable Plug for B1855a  
 RoHS Compliant



**Cambridge Connectors**  
 Denny Industrial Centre, Waterbeach, Cambridge. CB25 9QR  
 Tel: (01223) 860041 Fax: (01223) 863625

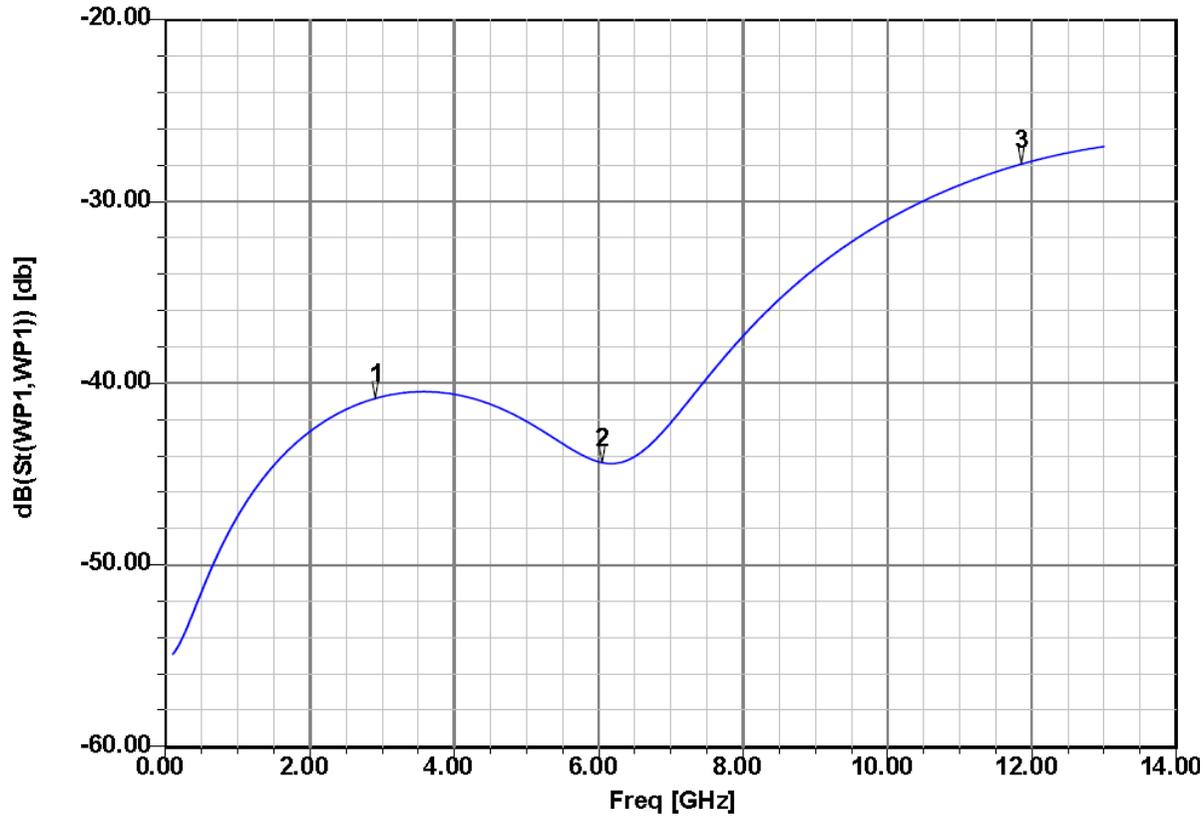

X1= 2.91GHz  
 Y1= -40.83

X2= 6.05GHz  
 Y2= -44.36

X3= 11.86GHz  
 Y3= -27.94

1.0	Origin	30/01/2015
<b>Iss. No.</b>	<b>CHANGE</b>	<b>Sig.Date</b>
Originated	PF	30/01/2015
Drn.	PF	30/01/2015
Chkd.		30/01/2015
Dwg. No.	NPF 4909	

**TITLE** Micro BNC Cable Plug for B1855a

RoHS  
 Compliant



**Cambridge Connectors**

Denny Industrial Centre, Waterbeach, Cambridge. CB25 9QR  
 Tel: (01223) 860041 Fax: (01223) 863625